



SECTION A-A - LEG & SLAT



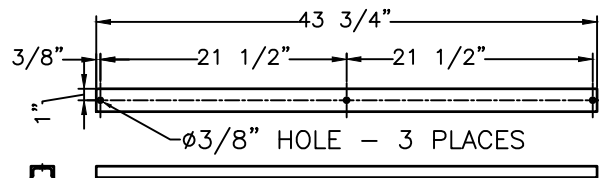


CHANNEL BRACE FOR RPL SLATS
MAT'L: 3/16" x 1" x 2" STEEL CHANNEL
4 REQUIRED


RPL IS HELD TO THE BRACES BY TAPERED SCREWS WHICH ARE DRIVEN INTO THE RPL FROM THE BOTTOM AND ARE NOT VISIBLE FROM ABOVE. McMASTER #95638A317 PIN-IN-TORX TAMPER RESIST SHEET METAL SCREW 18-8 STAINLESS STEEL, BUTTON HEAD, NO 14 SIZE, 1-1/2" LENGTH NOT VISIBLE FROM TOP OF BENCH.

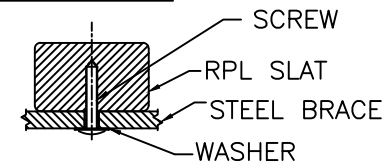

SECTION VIEW OF RPL SLAT
CROSS BRACE PLACED UNDER
SLAT AND OVER THE CHANNEL

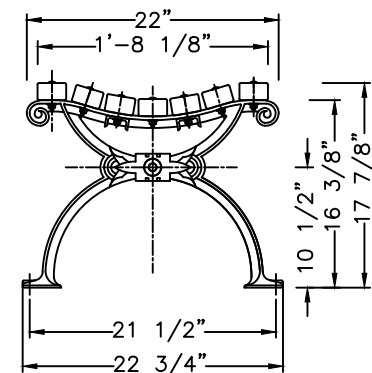


SIDE ELEVATION

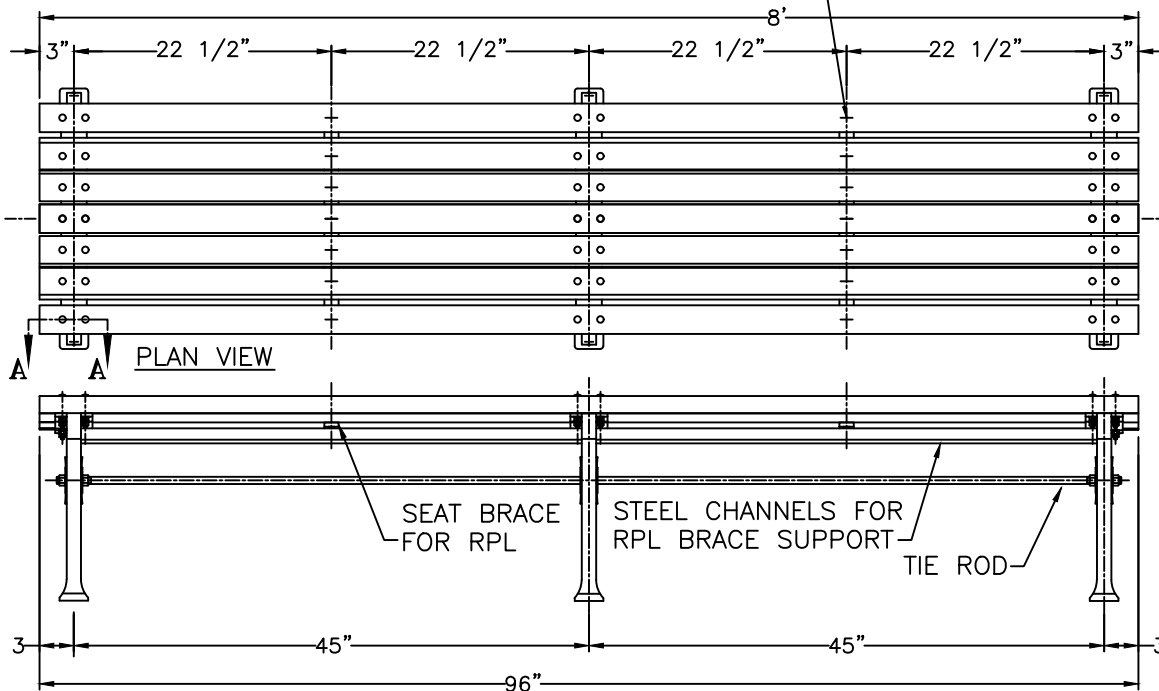

FRONT ELEVATION

8 FOOT BENCH
LENGTH OF AVAILABLE BENCHES:
4', 5', 6', 8'
BENCHES OF 6' AND LESS
HAVE TWO LEGS

NOTE: THIS DRAWING VARIES FROM
STANDARD IN THAT THE DISTANCE
FROM THE EDGE OF THE SLATS
TO THE CENTER OF THE LEG IS
3 INCHES.



TYPICAL SECTION

COLOR:

RPL

CI & STEEL: POWDER COAT BLACK

MATERIALS:

BENCH LEGS: CAST DUCTILE IRON

SEAT SLATS: RECYCLED PLASTIC LUMBER (RPL)

SMALL FASTENERS (CARRIAGE BOLTS, NUTS AND WASHERS) STAINLESS STEEL

TIE ROD: 5/8" DIA HOT ROLLED STEEL WITH

5/8 - 11 CUT THREADS & STEEL HEX NUTS

CROSS BRACE: 3/8" x 1 1/4" HOT ROLLED STEEL

LONG BRACE: 3/16" x 1" x 2" STEEL CHANNEL

WHEN USED, ANCHOR
BOLTS ARE TO BE
INSTALLED IN EACH
FOOT OF EACH LEG.

KENNETH LYNCH & SONS

114 WILLENBROCK ROAD OXFORD, CT 06478

PHONE 203-264-2831 FAX 203-264-2833

Revised:	Dr. By:	6736 WORLDS FAIR BACKLESS BENCH	
12/15/09	S.L.A.	Scale: FAX	Date 10/8/99
2/9/12	S.L.A.	DRAWN S.L.A.	
		RECYCLED PLASTIC SLATS	
		8' LONG	
		MAT'L: AS NOTED	
		CONTRACT #	
		#6736-8-RPL-FX-2012 NYC	