



SECTION A-A - LEG & SLAT

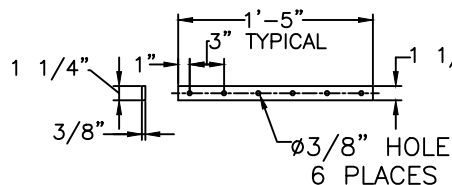


SEAT BRACE FOR RPL
3/8" X 1 1/4" X
17" LG HRS. 2 PIECES

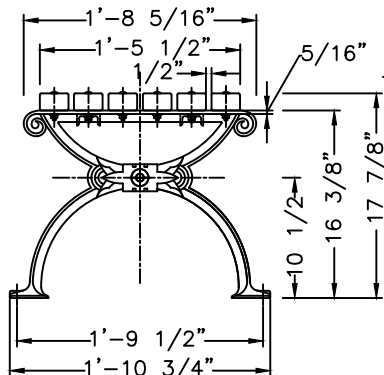

SIDE ELEVATION



BOTTOM VIEW OF FEET



TYPICAL SECTION

WHEN USED, ANCHOR
BOLTS ARE TO BE
INSTALLED IN EACH
FOOT OF EACH LEG.

COLOR:


RPL
CI & STEEL: POWDER COAT BLACK

MATERIALS:


BENCH LEGS: CAST DUCTILE IRON

SEAT SLATS: RECYCLED PLASTIC LUMBER (RPL)
SMALL FASTENERS (CARRIAGE BOLTS, NUTS AND
WASHERS) STAINLESS STEEL

TIE ROD: 5/8" DIA HOT ROLLED STEEL WITH
5/8 - 11 CUT THREADS & STEEL HEX NUTS
CROSS BRACE: 3/8" x 1 1/4" HOT ROLLED STEEL
LONG BRACE: 3/16" x 1" x 2" STEEL CHANNEL

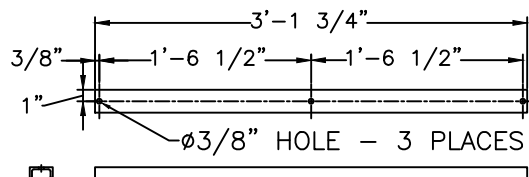


CHANNEL BRACE FOR RPL SLATS
MAT'L: 3/16" x 1" x 2" STEEL CHANNEL
4 REQUIRED

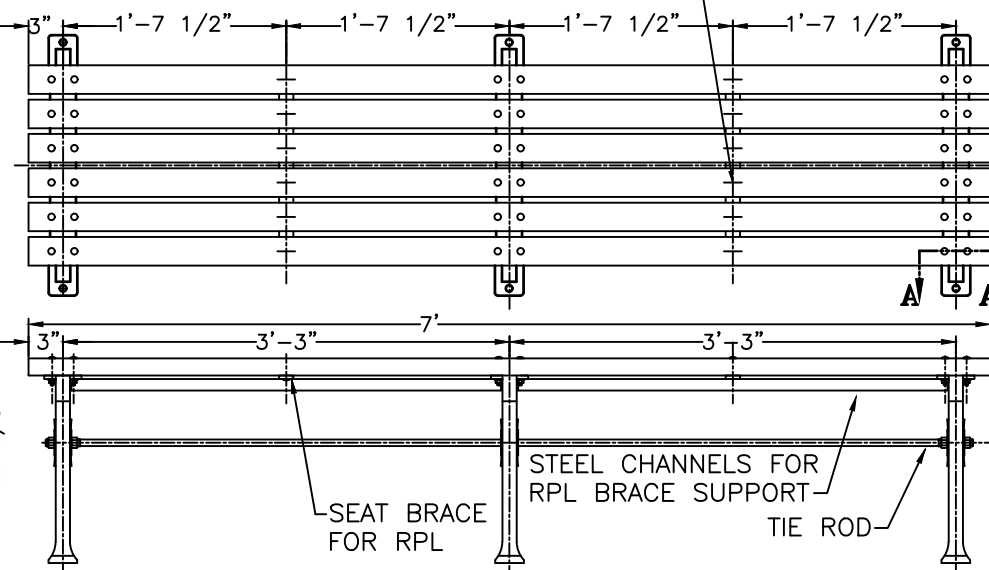


FRONT ELEVATION

RPL IS HELD TO THE BRACES BY TAPERED SCREWS
WHICH ARE DRIVEN INTO THE RPL FROM THE
BOTTOM AND ARE NOT VISIBLE FROM ABOVE.
McMASTER #95638A317 PIN-IN-TORX TAMPER
RESIST SHEET METAL SCREW 18-8 STAINLESS
STEEL, BUTTON HEAD, NO 14 SIZE, 1-1/2" LENGTH
NOT VISIBLE FROM TOP OF BENCH.

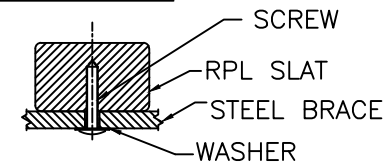

SECTION VIEW OF RPL SLAT
CROSS BRACE PLACED UNDER
SLAT AND OVER THE CHANNEL



END VIEW
RPL SLAT

7 FOOT BENCH
LENGTH OF AVAILABLE BENCHES:
4', 5', 6', 7', 8'
BENCHES OF 6' AND LESS
HAVE TWO LEGS

NOTE: THIS DRAWING VARIES FROM
STANDARD IN THAT THE DISTANCE
FROM THE EDGE OF THE SLATS
TO THE CENTER OF THE LEG IS
3 INCHES.

KENNETH LYNCH & SONS

114 WILLENBROCK ROAD OXFORD, CT 06478

PHONE 203-264-2831 FAX 203-264-2833

Revised:	Dr. By:	6736E WORLDS FAIR BACKLESS BENCH	
2/9/12	S.L.A.	Scale: FAX	Date 10/8/99
		RECYCLED PLASTIC SLATS	
		7' LONG	
		MAT'L: AS NOTED	CONTRACT #
		#6736E-7-RPL-4-FX-2012 NYC	